




ISO 9001 CERTIFICATE
ISO 14001 CERTIFICATE
UL MH28947

閥調式鉛酸蓄電池(VRLA) Valve Regulated Lead Acid Battery

NP12-6

尺寸 DIMENSION

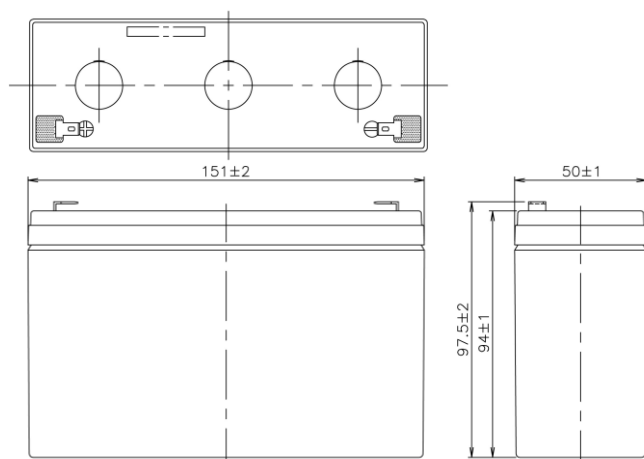

規範 Specification

- | | |
|--|---|
| ☒ 公稱電壓 Nominal Voltage : 6V | ☒ 操作溫度範圍 Operating Temperature Range |
| ☒ 尺寸 Dimension | 放電 Discharging -15°C to 45°C |
| 長度 Length : 151±2mm | 充電 Charging -15°C to 45°C |
| 寬度 Width : 50±1mm | 放置 Storage -15°C to 45°C |
| 高度 Case Height : 94±1mm | ☒ 期待浮充壽命 Expected float use life (25°C) : 3~5 years |
| 總高 Overall Height : 97.5±2mm | ☒ 容易保養 Easy Maintenance |
| ☒ 重量 Weight (約 Approx.) : 2 kg | 不會洩漏電解液 No electrolyte leakage |
| ☒ 公稱容量 Nominal Capacity : 12AH / 20HR (25°C) | 確保操作上安全性 Ensure safe and efficient operation |
| ☒ 內部抵抗 Internal Resistance(Approx.) : 約 6.6 mΩ | ☒ 電槽材質 Container Material : |
| ☒ 最大充電電流 Max. Charge current : 3A | NP12-6 難燃等級UL94HB Flame class : UL94HB |
| ☒ 5秒最大放電電流 | NP12-6FR 難燃等級UL94V0 Flame class : UL94V0 |
| Max. Discharge current in 5 seconds : 180A | ☒ 用途 Applications : |
| ☒ 浮動充電 Float Charging : 6.83±0.08V (25°C) | UPS 不斷電系統、電信、緊急照明、警報系統、儀器、太陽能發電系統 |
| ☒ 端子 Terminal : | UPS(Uninterruptible Power Supply)、Telecommunications、Emergency |
| 插入式端子 Faston tab : 187 / 250 | lighting、Alarm systems、Instrumentation、Solar powered systems |


NP12-6 性能規格 PERFORMANCE SPECIFICATION：安培 Amperes and 瓦特 Watts at 25 °C (77 °F)

TIME		3M	5M	6M	8M	10M	15M	30M	1H	2H	3H	5H	10H	20H
F.V.	W	296	252	237	199	179	137	83	48.1	26.0	18.6	12.1	6.39	3.55
	A	53.0	44.5	41.7	35.1	31.4	23.5	14.1	8.09	4.41	3.15	2.07	1.08	0.58
5.40V	W	331	270	250	210	186	140	84	48.7	26.6	19.0	12.5	6.57	3.57
	A	60.4	48.6	44.6	37.5	32.9	24.3	14.4	8.20	4.46	3.18	2.08	1.09	0.59
5.25V	W	361	286	260	219	190	147	85	49.2	26.9	19.2	12.6	6.64	3.58
	A	67.1	51.5	46.1	38.8	33.3	24.5	14.6	8.2	4.49	3.20	2.10	1.10	0.59
5.10V	W	365	289	262	221	192	148	86	49.4	27.1	19.3	12.7	6.70	3.62
	A	68.1	52.5	47.2	39.7	34.2	24.9	14.7	8.3	4.52	3.23	2.11	1.11	0.59
5.01V	W	398	303	270	228	195	150	87	49.7	27.3	19.5	12.8	6.77	3.66
	A	76.3	56.2	49.3	41.5	34.8	25.2	14.8	8.3	4.55	3.25	2.13	1.12	0.60


特性 Characteristics

放電特性 DISCHARGE CHARACTERISTICS


放電曲線 Discharge Characteristics Curves at 25°C

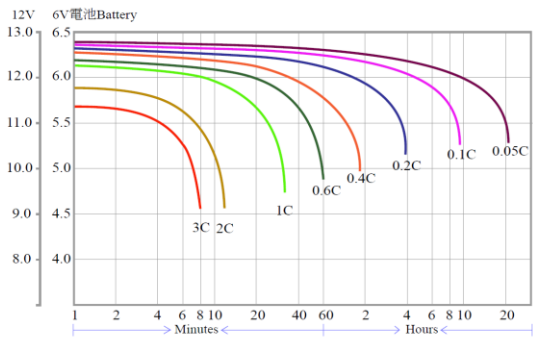

浮充期待壽命 Float Service Life

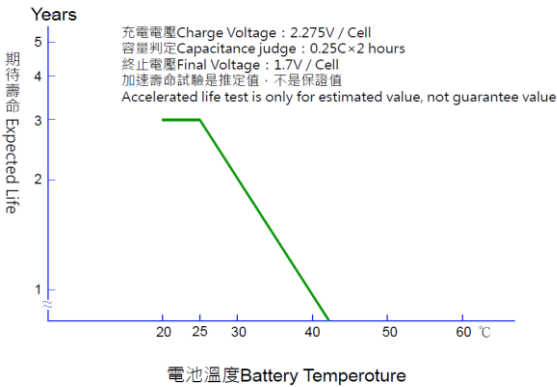

充電特性 CHARGE CHARACTERISTICS

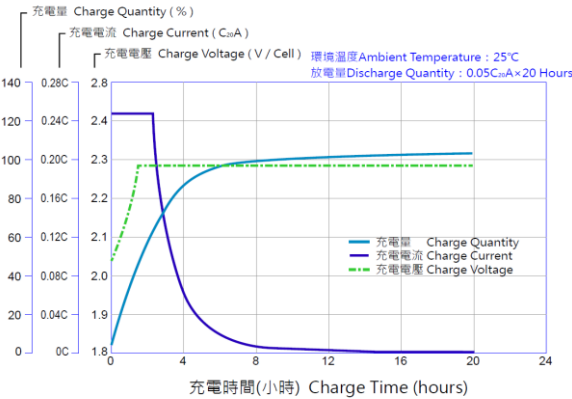

充電電壓 CHARGE VOLTAGE

